


Multi-Biometric Time Attendance & Access Control System

MB20

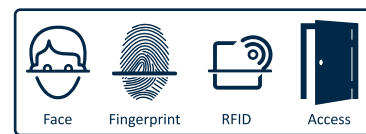

Specification

Storage Capacity

User Capacity : 1,000
Fingerprint Capacity : 500
Face Capacity : 200
Transaction Capacity : 50,000

Visual & Audio

Display : 2.8" Color LCD
Sound : Stereo Speaker

Communication

Communication : TCP/IP, USB-Host
Push Data : Yes (≤1 Sec)

Standard Functions

Automatic Status Switch, Self-Service Query, DST, T9 Input, 9Digit User ID, Scheduled Bell, Photo ID, Lock, Sensor, Exit Button

Power & Environment

Power Supply : DC 5V --- 0.8A
Operating Temperature : 0°C - 45°C
Operating Humidity : 20% - 80%
Dimension (in mm) : (L)161.93 x (W)152.82 x (H)30.59

Features

- Fingerprint, face, RFID and password
4 type verification mode
- High-speed identification less than 1 second
- TCP/IP Port for Internet connection
- Access Port available to control one lock and exit button
- Optional 5V 1900mAH UPS, standby up to 3 hours

Disclaimer: Brief specifications are mentioned here. Specifications may change without prior notice. Customers are advised to check with us before purchase.

Actual product may differ slightly to that depicted for ongoing product development

www.esslsecurity.com